



GHAZI

— 65 HP —



Highly Fuel Efficient,
Powerful and Durable



Effective Cooling
System for longer
operations



Reliable 8 x 2 Synchronesh
Transmission



Powerful Hydraulic
System with high lift
capacity



Dual Clutch system with
separate PTO & main
Clutch lever



High PTO horsepower



The king of rotavators,
bore wells and threshers



Low Maintenance Cost &
country wide availability
of spare parts



Convertible to High
Clearance for efficient spray
on cotton crop.



High Traction, Speed &
Power Steering.

For Export Inquiry:

www.alghazitractors.com | agtl.export@alghazitractors.com

UAN: +92 42 111 850 000 | Mobile: +92 321 4597901 | Tel: +92 42 36400484-99

GHAZI SPECIFICATIONS


ENGINE POWER	
At flywheel	65 HP
OPERATING WEIGHT	
	1,785 KG
ENGINE	
New Holland 8035.05	
4-Stroke, direct injection diesel engine	
Number of cylinder:	3
Bore and stroke:	104x 115 mm
Piston Displacement:	2,931 cc
Compression ratio:	17:1
Max. Torque at 1,500 rpm:	23.9 kgm
Dry-type cylinder liners	
Water cooling system,	
Five-row brass tube and fin radiator	
Forced-feed lubrication system	
Vertical exhaust muffler	
Distributor type fuel injection pump with mechanical speed governor	
FILTERS	
Air: Oil-bath with pre-cleaner	
Fuel: 2 replaceable cartridges;	
Oil: Easy-to-change, continuous flow cartridge	
CLUTCH	
Dual plate, dry-type, with separate controls (pedal for transmission and hand lever for PTO), diameter of plates: 11 inch	
Plates facing of asbestos compound	
TRANSMISSION	
Gear box with constant-mesh gears:	
8 forward and 2 reverse speeds	
Synchromesh on 3rd, 4th, 7th and 8th speeds	
Differential with pedal actuated lock and automatic disconnection	
Single-reduction spur gear final drives	
Gear Box mounted starter safety switch	

TYRES	
Front: Rear	6.00-16
FRONT AXLE	14.9/13-28
FRONT AXLE	
Telescopic type, inverted U, variable tread	
FENDER	
Flat top	
TRACKS	
Front (8 positions):	
1,320 - 1,420 - 1,520 - 1,620	
1,720 - 1,820 - 1,920 - 2,020 mm.	
Rear (8 positions):	
1,200 - 1,300 - 1,400 - 1,500-	
1,600 - 1,700 - 1,800 - 1,900 mm.	
STEERING	
Hydro assisted power steering with independent circuit.	
Turning radius:	
-with brakes: 3,400 mm	
-without brakes: 3,900 mm	
DRIVER`STSEA	
Deluxe seat with spring suspension, adjustable to driver`s weight	
POWER TAKE OFF	
6 spline shaft -35 mm dia /1- $\frac{3}{8}$ "	
Fully independent: 540 rpm at 2,160 engine rpm	
High-speed DTO (*) 35 mm dia / 1- $\frac{3}{8}$ "	
same speed as engine	
(*) for application of high speed implements.	
HYDRAULIC LIFT	
With draft and position control, Draft control through top link, Gear type hydraulic pump driven from engine crank shaft.	
Pump capacity: 22.71 /min	
Reliefvalve opening pressure: 150-170kg/cm ²	
3-point linkageCat I - II	
Manual response control.	
Lower links with inter changeable balls & sway restrictors	
Control Lever with safety stop.	
Max. Lifting capacity: 1,650 kg	

BODY	
Hood has side- hinged cover for engine inspection.	
Front grill is easily removable for quick access to air cleaner and battery	
LIGHTING SYSTEM	
With 3-position halogen headlamps	
Blue high beam warning light on dashboard.	
Low oil pressure warning light.	
Direction Indicators, Parking & Hazard lights.	
ELECTRICAL SYSTEM	
12 volt starting system, 3.35 HP (2.5kw) starter motor, 400 watt alternator, 100 ah battery, starting aid.	
CAPACITIES	
Fuel tank:	54 l
Engine oil:	08 l
Hydraulic Transmission:	18 l
Rear Axle:	2+2 l at both sided
Air Cleaner:	01 l
Power Steering:	1.5 l
BRAKES	
Service dry band-type with mechanical control	
Parking: with hand lever.	

Al-Ghazi Tractors Ltd reserves the rights to change specifications without prior notice.

DIMENSIONS	
(With 6.00-16 and 14.9/13-28 tyres)	
A. Wheelbase: 1,953 mm	E: Front track (8 positions): from 1,320 to 2,020 mm
B. Overall length: 3,046 mm	F: Rear track (8 positions): from 1,200 to 1,900 mm
C. Height to top of hood: 1,390 mm	G: Ground clearance under front axle: 480 mm
D. Height to steering wheel: 1,490 mm	

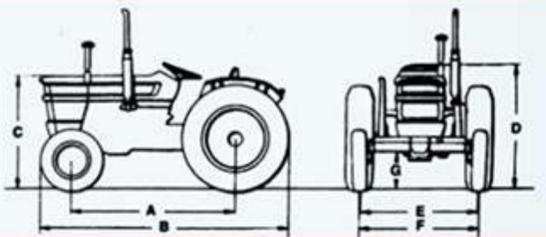


AL-GHAZI TRACTORS LTD.

Corporate Office: Al Ghazi Tractors Limited, 9th Floor, Askari Corporate Tower, Main Boulevard, Gulberg Lahore, Pakistan.
Ph: 04236400484 - 89

Email: muhammad.mohsin@alghazitractors.com | Website: www.alghazitractors.com

NOTE: AL-GHAZI TRACTORS LIMITED RESERVES THE RIGHT TO CHANGE THE SPECIFICATIONS WITHOUT PRIOR NOTICE






 alghazitractorsofficial
UAN: 042 111 850 000